

Model 6727
PRO-FIT® 4272
 Rectangular Air Massage Bath



Features

- 71-1/2" x 42" x 19-3/4" Rectangular air massage tub
- Powerful, single-speed blower and air switch
- Heating element warms the air before it enters the bathing well through the perimeter channel
- 20 minutes after the bath is turned off the motor automatically blows any remaining residue out of the "Quick Drain" air channel
- Limited One-Year Warranty
- Available in Standard Colors: white, almond, biscuit and bone



Model 6727
 (Shown with metal air switch and Lift and Turn drain)

Options

Lift and Turn Drain

Model #	Description		Model #	Description	
PF1320	Polished Chrome		SWP150	Nailing flange kit	
PF1321	Everbrass (PVD)		SWAP00	Factory installed nailing flange	
PF1322	Brushed Nickel				
PF1323	Oil Rubbed Bronze				

Metal Trim

Model #	Description		Model #	Description	
PF2335	Polished Chrome		PF1326B	6' Removable apron	
PF2336	Everbrass (PVD)				
PF2337	Brushed Nickel				
PF2338	Oil Rubbed Bronze				



MADE IN USA

Model 6727

PRO-FIT® 4272

Rectangular Air Massage Bath





Specifications

Model #	Description	Codes/Standards
6727	71-1/2" x 42" x 19-3/4" Rectangular air massage bath	  


Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	54
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	55 gal. (min.) / 80 gal. (max.)
Blower Motor	120V, 60HZ, 6.0 Amp, Single Speed blower, 200 Watt Heater, Single Phase—Pre-mounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)
Electrical Requirements	120V, 15 Amp, GFCI protected circuits	Shipping Weight	130 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

Technical Information

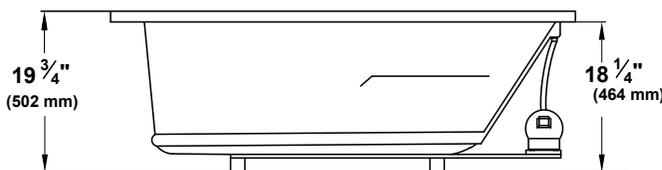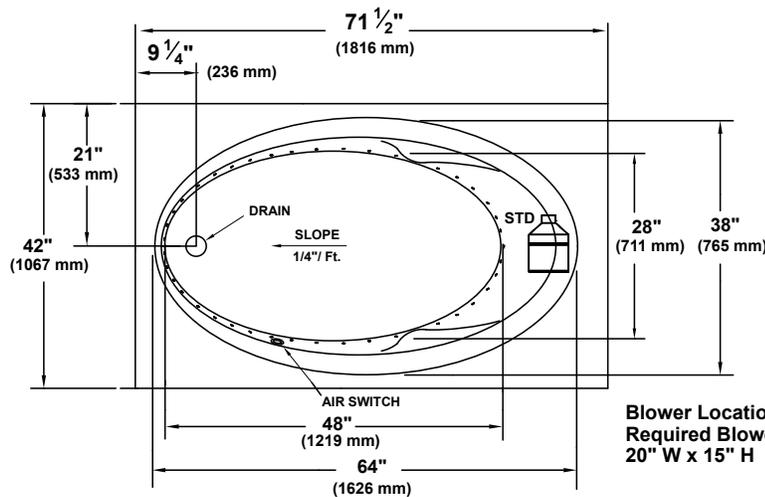


Note: If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

PLUMBING ROUGH-IN



**Blower Location (Standard Only)
Required Blower Motor Access
20" W x 15" H**

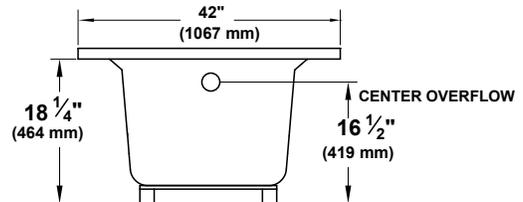

Note: Measurements may vary 1/4" (+/-)

Optional Removable Apron available.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.



MADE IN USA