

Model 6728E
PRO-FIT 4268
 Oval Air Massage Bath



Features

- 68" x 42" x 20" Oval air massage bath
- Powerful, single-speed blower and air switch for reliable operation
- Heating element warms the air before it enters the bathing well through the perimeter channel
- 20 minutes after the bath is turned off the motor automatically blows any remaining residue out of the "Quick Drain" air channel
- Available in Standard Colors: white, almond, biscuit and bone
- Limited One-Year Warranty



Model 6728E
 (Shown with metal air switch
 and Lift and Turn drain)

Options

Lift and Turn Drain

Model #	Description		Model #	Description	
PF1320	Polished Chrome		PF2335	Polished Chrome	
PF1321	Everbrass (PVD)		PF2336	Everbrass (PVD)	
PF1322	Brushed Nickel		PF2337	Brushed Nickel	
PF1323	Oil Rubbed Bronze		PF2338	Oil Rubbed Bronze	



MADE IN USA

Model 6728E
PRO-FIT 4268
 Oval Air Massage Bath




Specifications


Model #	Description	Codes/Standards
6728E	68" x 42" x 20" Oval Air Massage Bath	  

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	54
Construction	Self-contained, pre-plumbed air massage bath, mounted on a pre-leveled base	Water Capacity	59 gal. (min.) / 74 gal. (max.)
Blower Motor	120V, 60HZ, 6.0 Amp, Single Speed blower, 200 Watt Heater, Single Phase-Pre-mounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m ²)
Electrical Requirements	120V, 15 Amp, GFCI protected	Shipping Weight	158 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

Technical Information

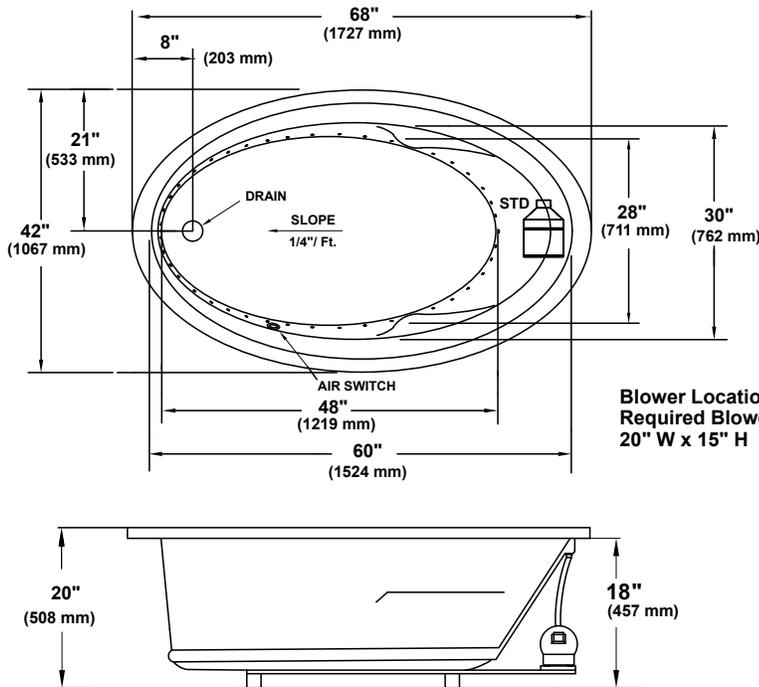

PLUMBING ROUGH-IN

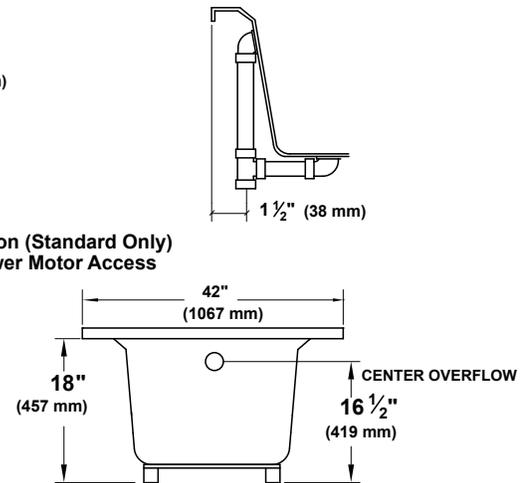

Blower Location (Standard Only)
 Required Blower Motor Access
 20" W x 15" H

Note: Measurements may vary 1/4" (+/-)

Optional Removable Apron not available on this unit.

Installer note: Due to the free-form shape of this tub, it is recommended that the tub be on the jobsite before making the final cut out for drop-in installation.

These dimensions are nominal and subject to change without notice.
 When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.
 Certified for permanent electrical connection only.



MADE IN USA