

# CP-1301 Commercial Package

Erie™ bowl, flush valve, toilet seat and wax ring



## Bowl Features

- Perfect for clinical applications
- 1.28 or 1.6 Gpf / 4.86 or 6.05 Lpf low water consumption
- 1-1/2" top spud for flush valve installation
- High performance, high efficiency (HET)
- The Mansfield® Limited lifetime warranty
- Available in White

## Valve Features

- Manual toilet flush valve for floor-mounted or wall-hung top spud bowls
- Chrome-plated housing
- Fits right or left hand supply
- Durable diaphragm with filtered fixed by-pass
- Chloramine resistant diaphragm
- ADA compliant metal non-hold-open handle with sealed handle package
- Vandal resistant torqued stop cap
- High back pressure vacuum break flush connection
- Spud coupling and flange for 1-1/2" top spud
- Chrome-plated copper casting resistant to dezincification
- 1" I.P.S. anglestop



Elongated Front



Model CP-1301

## Components

### CP-1301-128

### CP-1301-16

1301	Wall-mount, rear outlet, elongated front toilet bowl	1301	Wall-mount, rear outlet, elongated front toilet bowl
FM-T2	Flushometer Valve for 1.28 Gpf toilet	FM-T6	Flushometer Valve for 1.6 Gpf toilet
SB900	Commercial elongated toilet seat	SB900	Commercial elongated toilet seat
–	Wax ring	–	Wax ring

## Specifications

### BOWL


Model #	Description	Codes/Standards
1301	Wall-mount, rear outlet, elongated front toilet bowl. Includes 1-1/2" top spud.	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-1/8"
Flush System	Siphon Jet Technology	Rough-in	Rear Outlet
Water Usage	1.28 or 1.6 Gpf / 4.84 or 6.05 Lpf	Shipping Weight	Model 1301 - 54 lbs. (25 kg)
Water Surface Area	8-1/2" x 10-1/2"	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year
MaP Rating	1,000 grams		

### VALVE

Specification	Description	Specification	Description
Material	Brass Casting	Backflow Prevention	vacuum breaker/check valve
Plating	Chrome per ASTM B456	Water Type	potable cold water
Water Delivered	1.28 Gpf / 4.8 Lpf or 1.6 Gpf / 6.0 Lpf	Shipping Weight	7.15 lbs. (3.2 kg)
Water Pressure Range	20 to 125 psi	Warranty	Limited Three Years

## Technical Information

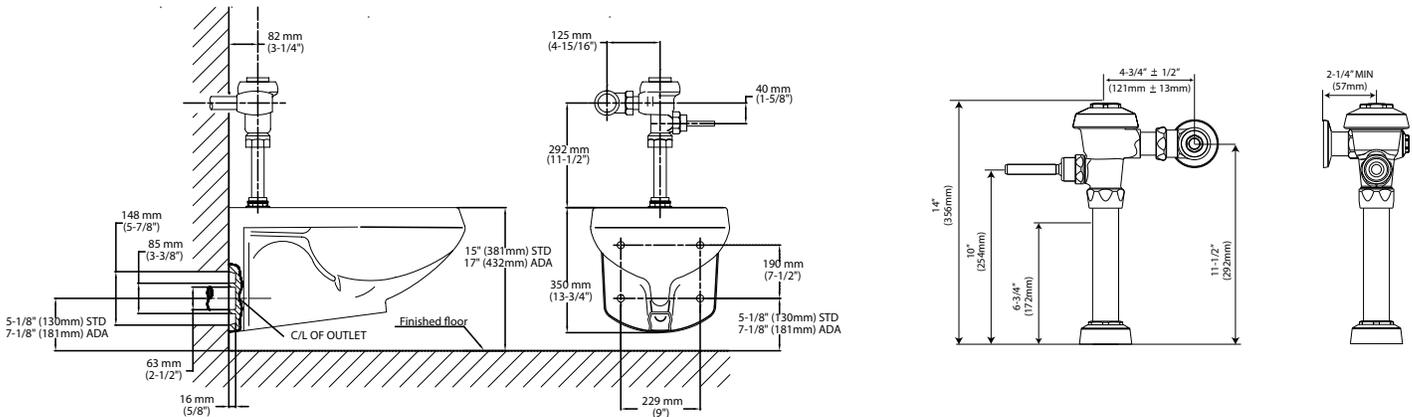

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

Valve specifications meet or exceed ASSE-1037 standards.

Meets or exceeds American Disabilities Act and ANSI A.117.1 requirements where installed so top of rim is 17" (432 mm) from the finished floor.