#### Bathtub and Whirlpool Features \_\_\_\_\_

- 60" x 32" x 22-1/2" rectangular bathtub
- Sculpted armrests and lumbar backrest
- One pillow
- Drop-in or undermount installation
- Two decorative handles
- Mansfield® Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone) and premium colors (black and ice gray)

# **Basic Whirlpool Features**

- Hydro-V back jet system
- Single speed pump
- 1-button electronic keypad
- · Color match trim
- Dual air controls

# **Luxury Whirlpool Features**

- Hydro-V back jet system
- Variable speed pump
- 5-button electronic keypad with digital temperature readout
- Metal trim upgrades
- Chromotherapy system
- Inline heater



Model 5067LUX

#### Options \_

# Cable Drain Nailing Flange - Factory Installed

Model #	Description		Model #	Description	
SW1319	Standard Colors		SWP150L	Left Hand	
SW1320	Polished Chrome		SWP150R	Right Hand	
SW1321	Everbrass (PVD)	+	SWP150S	Special location -	
SW1322	Brushed Nickel			diagram required	9
SW1323	Oil Rubbed Bronze		SWAP00	Nailing Flange Kit	Mansfield
SWA100	Pillow	1		(field installed)	

# **Whirlpool Options**

#### **Metal Trim**

Model #	Description		Model #	Description	
SW1335	Chrome				
SW1336	Everbrass (PVD)	9 9 8 9 9 8	SWP151	In-line water heater	
SW1337	Brushed Nickel				
SW1338	Oil Rubbed Bronze				




# **Specifications**

Model #	Description	Codes/Standards
5567	60" X 32" X 22-1/2" Rectangular Bathtub	
5067BAS	60" X 32" X 22-1/2" Basic Whirlpool Package	U P C USPC US
5067LUX	60" X 32" X 22-1/2" Luxury Whirlpool Package	▼

Specification	pecification Description		Description
Material	Acrylic, fiberglass reinforced	Number of Jets	14
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	56 gal. (min.) / 66 gal. (max.)
Pump Motor	Basic: 1.5 HP Single speed induction pump Luxury: 1.5 HP Variable speed induction pump	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	Basic: One 120V, 20 Amp, GFCI dedicated circuit. Optional heater: separate 120V, 20 Amp, GFCI dedicated circuit. Luxury: Two separate 120V, 20 Amp, GFCI dedicated circuits.	Shipping Weight	whirlpool - 160 lbs. bathtub - 150 lbs.
On/Off Control	Basic: 1-button electronic control pad Luxury: 5-button electronic control pad with digital readout showing temperature of water, speed of pump and time remaining in 20-minute cycle.	Warranty	Limited Ten Year

#### **Technical Information**

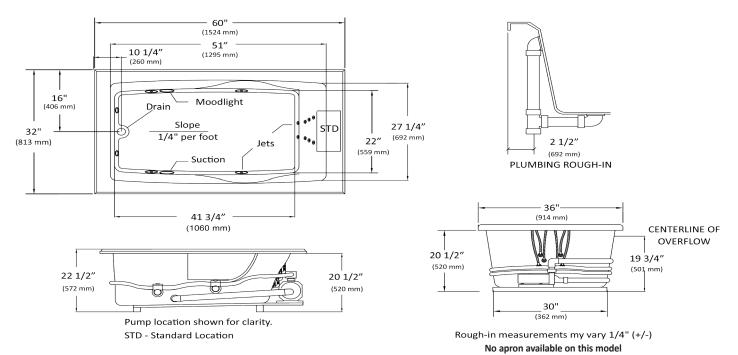

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.



MADE IN USA