

1319 BPL Adriatic™

Smart Height™, Elongated Front, Flush Valve, 1.28 or 1.6 Toilet, 10" Rough-in



Features

- Perfect for clinical applications
- Built-in bedpan lugs so bedpans stay secure
- ADA Compliant
- SmartHeight™ (17" high bowl) chair height for maximum comfort
- 1.28 or 1.6 Gpf / 4.86 or 6.05 Lpf low water consumption*
- High performance, high efficiency (HET)
- 1-1/2" top spud for flush valve installation, will accommodate many brands of flush valves
- 10" Rough-in
- 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White only






Elongated Front



Model 1319 BPL
(Less toilet seat,
hardware and supply)

Components

Model #	Description	Codes/Standards
1319BPL	SmartHeight™, elongated front toilet with built-in bed pan lugs. Includes a 1-1/2" top spud. Less toilet seat and flush valve. White only.	  




*When using the proper 1.28 flushometer

1319BPL Adriatic™

Smart Height™, Elongated Front, Flush Valve, 1.28 or 1.6 Toilet, 10" Rough-in




Specifications

Model #	Description	Codes/Standards
1319BPL	Smart Height™, Elongated Front, Flush Valve, 1.28 or 1.6 Toilet - 10" Rough-in	  

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	2-1/8"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-3/8"
Water Usage	1.28 or 1.6 gpf / 4.86 or 6.0 lpf	Rough-in	10"
Water Surface Area	9-7/8" X 11-7/8"	Shipping Weight	Model 1319BPL - 58 lbs. (26 kg)
MaP Rating	1000 grams	Warranty	Vitreous China - Limited Lifetime Tank Trim - Five Year Limited

Technical Information

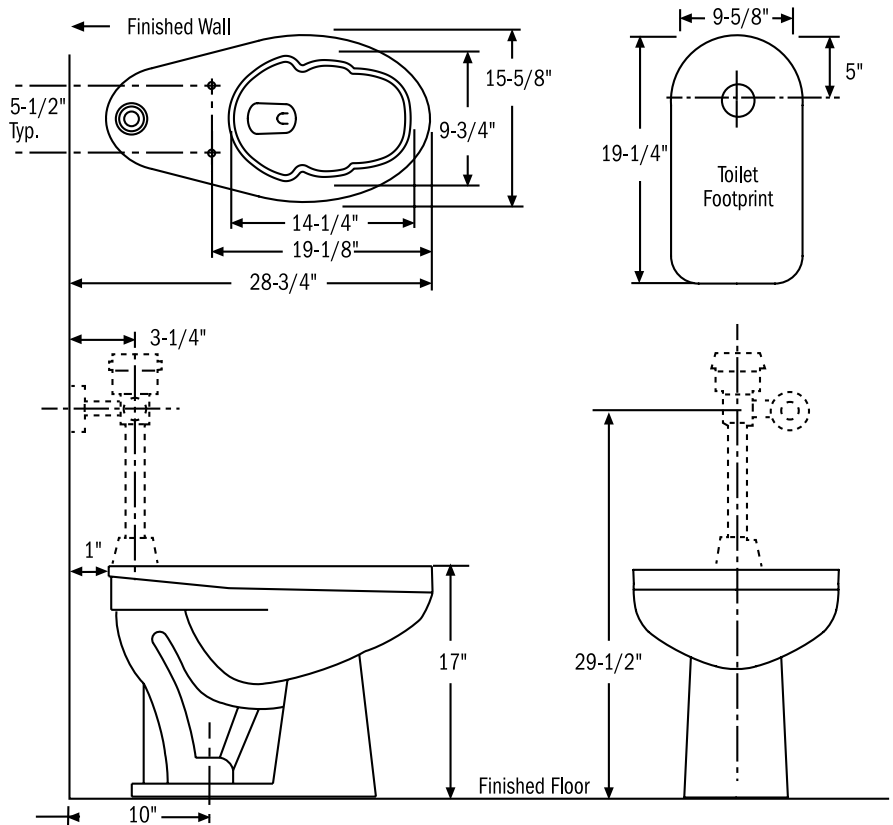

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.

Engineered to dramatically meet or exceed all ANSI weight/load bearing requirements.

Meets or exceeds American Disabilities Act and ANSI A.117.1 requirements where installed so top of rim is 17" (432 mm) from the finished floor.