

# 149-119 EcoQuantum®

Elongated Front, Pressure-Assist, Dual Flush, Rear Outlet, Vitreous China, Two-Piece Toilet






## Features

- Elongated, rear outlet, floor mount
- “Dual action” trip lever
  - Push down for high efficiency flush 1.1 gpf / 4.0 lpf
  - Pull up for full flush 1.6 gpf / 6.0 lpf
- High performance, high efficiency (HET), pressure-assist, EcoFlush™ technology
- Watersense certified
- Model 50 chrome plated metal trip lever
- 1-7/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in White and Standard Colors: Biscuit and Bone



**Model 149-119**  
Toilet seat not included.

## Components

Model #	Description	Codes/Standards
149-119	Elongated front, rear outlet, floor-mount, dual flush pressure-assist toilet. Includes tank trim and chrome plated, metal trip lever. Less toilet seat and supply. Specify color.	  
149	Elongated front, rear outlet, floor mount toilet bowl only. Less toilet seat and supply. Specify color.	
119	Dual Flush, pressure-assist tank and cover only with left hand, chrome plated metal trip lever. Less supply. Specify color.	
119RH	Same as model 119, except with right hand trip lever.	
119CL	Same as model 119, except with cover lock.	




**MADE IN USA**

## Specifications

Model #	Description	Codes/Standards
149-119	Elongated front, pressure-assist, dual flush, rear outlet, two-piece toilet	

Specification	Description	Specification	Description
Material	Vitreous China	Trap Diameter	1-7/8"
Water Pressure Range	35 to 80 PSI	Trap Seal	2-3/4"
Flush System	EcoFlush™ Dual Flushing Technology	Shipping Weight	Model 149 - 60 lbs.
Water Usage	1.1 gpf / 4.0 lpf or 1.6 gpf / 6.0 lpf		Model 119/119CL/119RH - 42 lbs
Water Surface Area	9-7/8" X 12-1/4"	Warranty	Vitreous China - Limited Lifetime
MaP Rating	500 grams		Tank Trim - Five Year Limited

## Technical Information

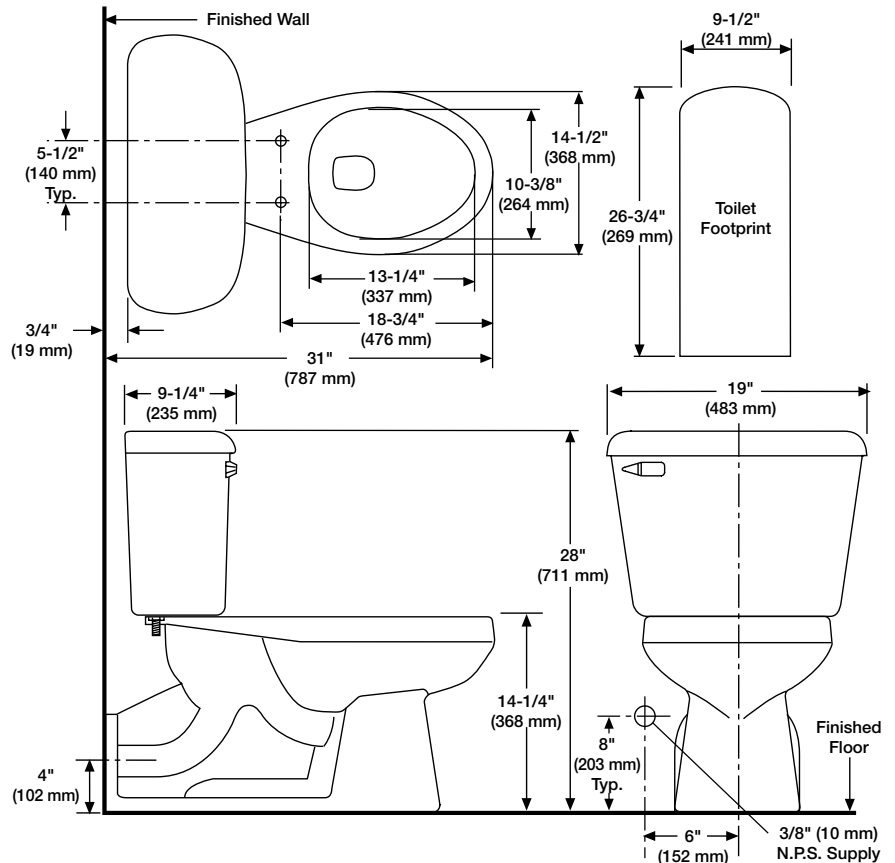

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.



**MADE IN USA**