




PRO-FIT® WHIRLPOOL & BATHTUB

3266 TFS 66" x 32" x 20"

Model number: 6156/6656 LH, 6157/6657 RH

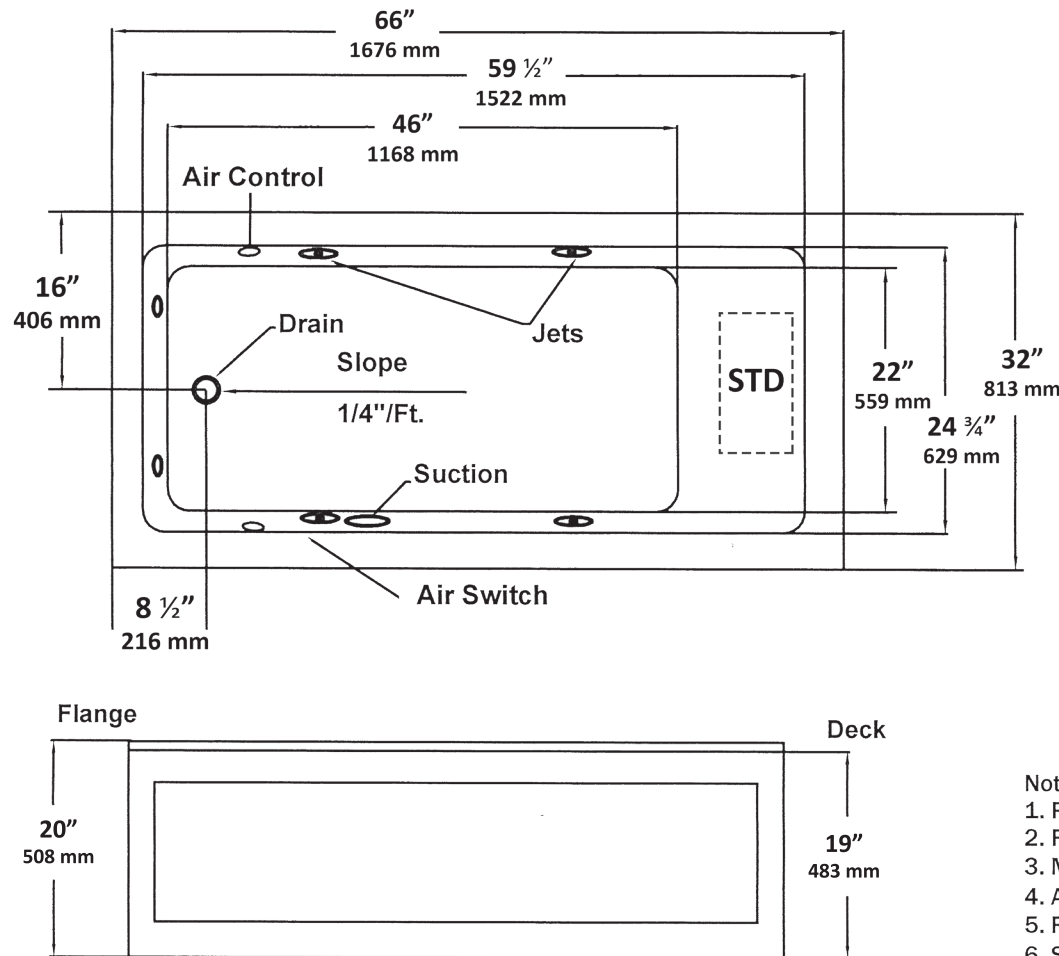

PLUMBING
ROUGH-IN

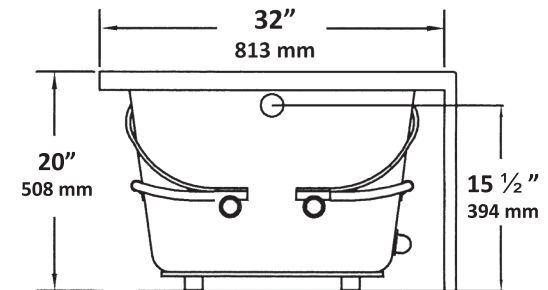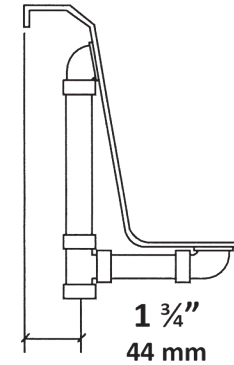

CENTERLINE
OF
OVERFLOW

Notes:

1. Pump location shown for clarity.
2. Required pump motor access is 20" W x 15" H.
3. Measurements may vary 1/4" (+/-)
4. Apron is integral with optional removable access panel.
5. Removable access panel provides access to pump/motor.
6. Specify LH or RH drain when ordering.

SPECIFICATIONS:

Dimensions:	66" x 32" x 20"	Number of jets:	6
Material:	Acrylic, fiberglass reinforced	Weight:	WP - 95 lbs. BA - 75 lbs. (43-34 kg)
Pump Motor:	120 V, 60 HZ, 6.0 Amp, Single Speed, Premounted	Water Capacity:	60 gals max., 40 gals min. (227/151 liters)
Electrical Requirements:	120 V, 15 Amp, GFCI Protected	Floor Loading:	47 lbs./sq.ft. (229 kg/m ²)
On/Off Control:	Air Switch	Shipping Weight:	135 lbs. /115 lbs. (62/52 kg)