



135-189

WAVE™

Elongated Front, Vitreous China, Two-Piece Toilet with Distinctive Wave Tank Design

FEATURES

- 1.6 Gpf / 6.0 Lpf
- Two-Inch Glazed Trapway
- 12" Rough-in
- Large 8-1/16" x 9-5/16" Water Surface
- Gravity-Fed, High Performance SmartFlush™ Flushing Technology
- Available in White and Standard Colors (Consult Price Book for Specific Colors)
- Model 55 Chrome Plated, Metal Trip Lever (Consult Price Book for Additional Finishes)
- Upgrade with a Color-Match SmartClose™ or Primo™ Toilet Seat
- Outstanding Protection – The Mansfield® Limited Lifetime Warranty



Model 135-189
Shown in White with
SB1200 Primo™ Toilet Seat

Model No.	Description	Approx. Wt.
135-189	Elongated front (1.6 Gpf/6.0 Lpf) two-piece toilet with Wave™ styling. 12" Rough-in. Includes tank trim and chrome plated, metal trip lever. Less toilet seat and supply. Specify color.	80 lbs. (36 kg)
135	Elongated front toilet bowl only. 12" rough-in. Less toilet seat. Specify color.	47 lbs. (21 kg)
189	Wave Tank and cover only with left hand, chrome plated, plastic trip lever. Less supply. Specify color.	33 lbs. (15 kg)
SB1175	Elongated, SmartClose™ toilet seat.	5.5 lbs. (2 kg)
SB1200	Elongated, Primo™ toilet seat.	5.5 lbs. (2 kg)



135-189

WAVE™

Elongated Front, Vitreous China, Two-Piece Toilet with Distinctive Wave Tank Design

FEATURES & UPGRADES

Three-Point Cushioned Tank-to-Bowl Connection

This assures perfect tank alignment in every direction. It permits fast, accurate, leakproof tank-to-bowl connections. Protects against tank breakage... can't be rocked loose... saves installation time. Furnished with brass nuts and bolts.



211 Flush Valve

The 211 flush valve provides 1.6 Gpf / 6.0 Lpf water conservation efficiency with non-corrosive, long-life dependability. It seals tight every time. Won't rust or corrode.



88 Anti-Siphon Ballcock

The 88 anti-siphon ballcock affords efficient toilet tank operation at high or low pressures. Adjustment screw allows water level adjustment without bending the float rod. Completely non-electrolytic and non-corrosive.



Add a Toilet Seat


With a simple touch, Mansfield's newest SmartClose™ toilet seat closes gently and quietly. Or upgrade your toilet with a popular Primo™ toilet seat. Made of durable, high impact, heavy-duty plastic. For all applications – Get More, Get Mansfield®.



TECHNICAL INFORMATION

Specifications

Material	Vitreous China
Water Pressure Range	15 to 125 P.S.I.
Flush System	SmartFlush™ Flushing Technology
Water Usage	1.6 Gpf / 6.0 Lpf
Water Surface Area	8-1/16" x 9-5/16"
Trap Diameter	2"
Trap Seal	2-5/8"
Rough-In	12"
Shipping Dimensions	Model 135 27-1/4" x 14-7/8" x 15-1/2" (692 mm x 378 mm x 394 mm) Model 189 19-3/4" x 10" x 14-3/4" (502 mm x 254 mm x 375 mm)
Shipping Weight	Model 135 – 46.9 lbs (21 kg) Model 189 – 33.2 lbs (15 kg)
Warranty	Vitreous China – Limited Lifetime Tank Trim – Limited One Year

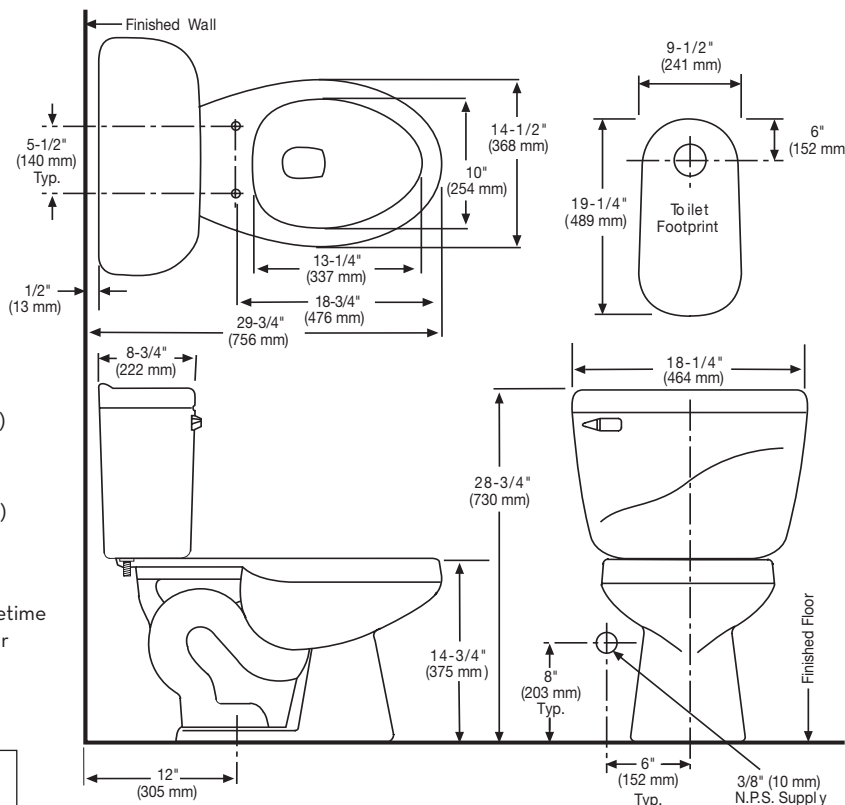

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2M, A112.19.6 and CAN/CSA B45 standards, and other state and local codes.

NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.12.2

See our complete line of acrylic and vitreous china bathroom and kitchen fixtures, plastic tank trim and plumbing products.



Mansfield Plumbing Products LLC • Customer Services Toll Free 877-850-3060 • Fax 419-938-6234
Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com

Form No. M135189 Printed in U.S.A. 12/06
© 2006 Mansfield Plumbing Products LLC